





**CRAM-A-LOT®**

**CV SERIES**

**COMPACTOR SPECIFICATIONS**

SPECIFICATIONS	
Clear Top Opening	33" x 48"
Cycle Time	34 seconds
Operating Pressure, Normal	2000 psi
Maximum	2400 psi
Ram Force, Normal	25,100 lbs.
Maximum	30,200 lbs.
Ram Face Pressure, Normal	10.6 psi
Maximum	12.8 psi
Ram Penetration	29.5"
Electric Motor	3 hp
Pump Capacity	3 gpm
Tank Capacity	8 gal.
Hydraulic Cylinder, Bore	4"
Stroke	18"
Rod	2"

**STANDARD FEATURES**



- > UL/UL Canada listed Control Panel
- > Integral Power Unit
- > Control Panel built into side of Compactor
- > Heavy Duty Oil-tight Pushbutton Controls
- > Key-lockable Start Pushbutton
- > Automatic Single-cycle Operation
- > Safe To Haul Indicator Light
- > Door Safety Interlock

This equipment conforms to all current ANSI Z 245.2 safety standards.

In order to provide the most currently engineered and designed equipment, we reserve the right to change specifications without prior notice. This brochure is intended to provide information only and should not be used in an arbitrary manner to judge equipment for any particular purpose. Performance may vary with application. Products must be installed and operated according to required standards, codes, regulations and safety procedures. Only the standard written warranty issued by J.V. Manufacturing, Inc. applies.

MODEL	FEED HEIGHT "A"	CV HEIGHT "B"	CV WIDTH	CV LENGTH	CONTAINER HEIGHT "C"	TOTAL WEIGHT	CONTAINER WEIGHT
<b>CV-03*</b>	46-3/4"	84-7/8"	94"	79-1/2"	42-1/8"	3,460 LBS.	565 LBS.
<b>CV-04</b>	46-3/4"	84-7/8"	94"	79-1/2"	42-1/8"	3,625 LBS.	765 LBS.
<b>CV-06</b>	58-7/8"	96-15/16"	94"	79-1/2"	54-1/16"	3,810 LBS.	950 LBS.
<b>CV-08</b>	73-1/4"	111-3/16"	94"	79-1/2"	68-5/8"	4,145 LBS.	1,230 LBS.

\* Container mounted on casters.

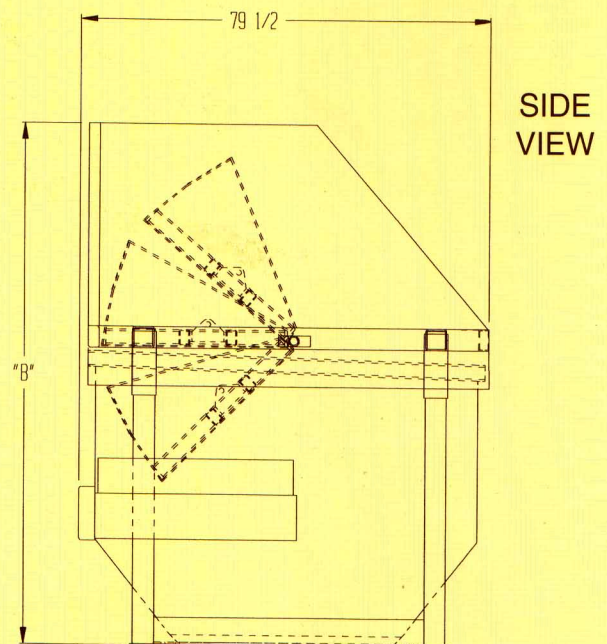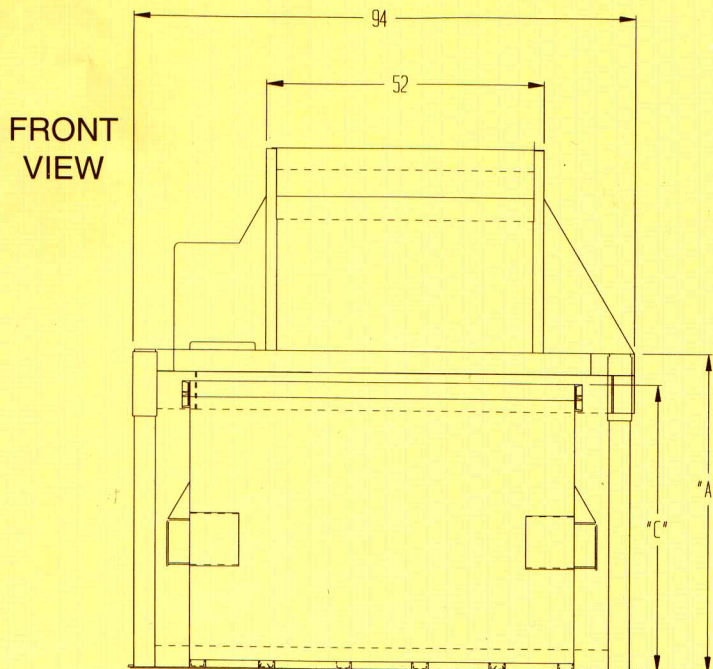

**Manufacturing a full line of CRAM-A-LOT® Solid Waste Equipment**